



MARINE LUBRICANTS WITH THE POWER TO PROTECT



YOUR VESSEL, YOUR EQUIPMENT AND THE ENVIRONMENT

ATB BIOBASED EP-2 GREASE

- Meets U.S. EPA Vessel General Permit (VGP) Requirements.
- Passes U.S. EPA Static Sheen Test 1617.
- Passes U.S. EPA Acute Toxicity Test LC-50.
- Ultimately Biodegradable (Pw1) Base Fluid – 75.2%.
- For Use On Articulated Tug Barge (ATB) Notch Interface, Coupler Ram and Drive Screws, Above Deck Equipment, Rudder Shafts, Wire Rope, Port Equipment and Cranes, Barges and Oil Platforms.

BIO-SYNXTREME HF SERIES HYDRAULIC FLUIDS

- Meets U.S. EPA Vessel General Permit (VGP) Requirements.
- Advanced synthetic Polyalkylene Glycol (PAG)-based formulas.
- Provides long service life and operating reliability, lower maintenance costs, and reduced overall downtime.
- Excellent Anti-Wear Performance - Rated as anti-wear (AW) fluids according to ASTM D7043 testing and FZG testing.
- High flash and fire points provide safety in high temperature applications.
- All Season Performance – High viscosity indices and low pour points, allowing year-round usage.
- Biodegradability – Readily biodegradable according to OECD 301F.
- Non-Sheening – Does not cause a sheen or discoloration on the surface of the water or adjoining shorelines.
- "Practically Non-Toxic" to fish and other aquatic wildlife according to the U.S. Fish and Wildlife Service hazard classification.



VGP COMPLIANCE STATEMENT

LUBRIPLATE ATB BIOBASED EP-2 GREASE and BIO-SYNXTREME HF SERIES HYDRAULIC FLUIDS are Environmentally Acceptable Lubricants (EAL)s according to the definitions and requirements of the US EPA 2013 Vessel General Permit, as described in VGP Section 2.2.9



Lubriplate
Lubricants

Newark, NJ 07105 / Toledo, OH 43605 / 800-733-4755
www.lubriplate.com / LubeXpert@lubriplate.com



Authorized Distributor:

ATLANTIC CORDAGE
35 Mileed Way
Avenel, NJ 07001
Tel 732-574-0700
Fax 732-574-9191
atlantic-group.com
E-mail: sales@atlantic-group.com

LUBRIPLATE® ENVIRONMENTALLY ACCEPTABLE LUBRICANTS (EAL)s FOR MARINE APPLICATIONS



Lubriplate is committed to providing you with the right lubrication protection for your vessel and other equipment affected by (VGP) Vessel General Permit regulations. Designed specifically for use in harsh marine conditions, these high performance, Environmentally Acceptable Lubricants (EAL)s deliver all the performance and protection you need, while maintaining compliance with regulations protecting the environment. Formulated to reduce their impact on the environment they Meet U.S. EPA Vessel General Permit (VGP) Requirements.



VGP COMPLIANCE STATEMENT

LUBRIPLATE ATB BIOBASED EP-2 GREASE and BIO-SYNXTREME HF SERIES HYDRAULIC FLUIDS are Environmentally Acceptable Lubricants (EAL)s according to the definitions and requirements of the US EPA 2013 Vessel General Permit, as described in VGP Section 2.2.9



LUBRIPLATE® ATB BIOBASED EP-2 GREASE SPECIFICATIONS

This Environmentally Acceptable Lubricant (EAL) was designed to outperform conventional products in a variety of marine applications. It has excellent water resistance, good oxidative stability and provides a high level of protection against rust and corrosion. It is excellent for all slow to medium speed bearings. It has exceptional high shear stability, excellent water resistance and outstanding load-carrying properties.

APPLICATIONS: Articulated Tug Barge (ATB) Notch Interface, Coupler Ram and Drive Screws, Above Deck Equipment, Rudder Shafts, Wire Rope, Port Equipment and Cranes, Barges, Oil Platforms, Water Treatment and Hydroelectric Facilities.

ADVANTAGES:

- Meets U.S. EPA Vessel General Permit (VGP) Requirements.
- Passes U.S. EPA Static Sheen Test 1617.
- Passes U.S. EPA Acute Toxicity Test LC-50.
- Ultimately Biodegradable (Pw1) Base Fluid – 75.2%.
- Excellent Extreme Pressure / Anti-Wear Properties.
- Extremely Shear Stable.
- Good sealing properties to keep out water and dirt.
- Outstanding resistance to washout fresh and salt water.
- Tenacious and adhesive to increase stay-put properties.
- Outstanding pumpability.

PERFORMANCE PROPERTIES	TEST METHOD	ATB BIOBASED EP-2
Lubricant Type of Base	-	Lithium 12-Hydroxy Stearate
Worked Penetration	ASTM D-217	265 - 295
NLGI Grade	ASTM D-217	2
Dropping Point	ASTM D-566	385°F / 196°C
Timken EP Test: OK Load	ASTM D-2783	40 lbs.
Four Ball EP Test: OK Load	ASTM D-2783	250
Four Ball Wear Test: 40 kg, 75C, 1200 rpm 1hr	ASTM D-4172	0.44 mm
Base Oil Viscosity - SUS@100°F	ASTM D-88	500
Base Oil Viscosity - cSt@40°C / cSt@100°C	ASTM D-445	100 / 19
Base Fluid Biodegradability	ASTM D-5864	75.2% / Ultimate (Pw1)
Aquatic Toxicity	OECD 203	>100 mg/l
Corrosion Prevention	ASTM D-1743	1, 1, 1
Copper Corrosion	ASTM D-130	1a
Oxidation Stability	ASTM D-942	3 psi /100 hours
Water Washout (100°F)	ASTM D-1264	<1%
Lincoln Ventmeter @77°F / @30°F / @0°F	-	321 psi / 458 psi / 1,115 psi
PACKAGING AVAILABLE / PART NUMBER		
120 lb Lined Drum	-	Part No. L0342-039

LUBRIPLATE® BIO-SYNXTREME HF SERIES HYDRAULIC FLUIDS SPECIFICATIONS

These high performance, zinc-free hydraulic fluids are designed for demanding industrial and marine (Vessel General Permit) applications requiring environmental sensitivity, fire resistance, and excellent anti-wear properties over wide temperature ranges. They are Polyalkylene Glycol (PAG) based fluids, that are anhydrous (water-free). LUBRIPLATE BIO-SYNXTREME Hydraulic Fluids do not break down to form sludge and they do not hydrolyze in the presence of water.

ADVANTAGES:

- Meets U.S. EPA Vessel General Permit (VGP) Requirements.
- Advanced Synthetic Polyalkylene Glycol (PAG)-based fluids.
- Provides long service life and operating reliability, lower maintenance costs, and reduced overall downtime.
- Excellent Anti-Wear Performance - Rated as anti-wear (AW) fluids according to ASTM D7043 testing and FZG testing.
- High flash and fire points provide safety in high temperature applications.
- All Season Performance – High viscosity indices and low pour points, allowing year-round usage.
- Biodegradability – Readily biodegradable according to OECD 301F.
- Non-Sheening – Does not cause a sheen or discoloration on the surface of the water or adjoining shorelines.
- “Practically Non-Toxic” to fish and other aquatic wildlife according to the U.S. Fish and Wildlife Service hazard classification.

COMPATIBILITY: BIO-SYNXTREME HF fluids are not compatible with hydrocarbon-based hydraulic fluids. As with any fluid conversion, recognized industry procedures including system cleanup and flushing should be followed. Contact your representative for detailed conversion procedures. Compatible elastomers are: Viton, Kalrez, Silicone, Polysulfide, EPR, Butyl Rubber, Buna N, Fluoraz, EPDM, Natural Black Rubber, Natural Red Rubber and Aflas.

PERFORMANCE PROPERTIES	TEST METHOD	BIO-SYNXTREME HF-32	BIO-SYNXTREME HF-46	BIO-SYNXTREME HF-68
FZG Visual Gear Test, Stages Passed	ASTM D5182	12	12	12
Four Ball EP Test				
Load Wear Index		32.94	33.10	33.26
Last Non-seizure, 80 kg (mm scar)	ASTM D2783	0.40	0.40	0.39
Last seizure, 126 kg (mm scar)		2.75	2.60	2.53
Weld Load, kg		160	160	160
V104 Vane Pump Test (total mg wear)	ASTM D7043	<10	<10	<10
35 VQ Vickers Vane Pump Test		Pass	***	***
Individual Cartridge Wear, mg	M-2950-S	8,8		
Average Wear, mg		8		
Sonic Shear Stability				
Initial Viscosity @ 40°C (cSt)	ASTM D5621	36.8	47.1	68.9
Irradiated Viscosity @ 40°C (cSt)		36.9	47.0	69.2
VISCOSITY PROPERTIES				
Viscosity @ 40°C (cSt)		35.4	46.0	68.0
Viscosity @ 100°C (cSt)	ASTM D445	8.0	9.8	13.7
Viscosity @ 0°C (cSt)		294	390	614
Viscosity Index	ASTM D2270	194	200	209
FIRE PROPERTIES				
Flash Point – Cleveland Open Cup, °C	ASTM D92	271	312	288
Flash Point – Pensky Martens Closed Cup, °C	ASTM D93	218	223	None1
Fire Point, °C	ASTM D92	304	316	322
PHYSICAL - CHEMICAL PROPERTIES				
Specific Gravity @ 20°C	ASTM D1298	1.031	1.035	1.041
Foam Test – Sequence I, Initial Volume/ml		10/0	10/0	10/0
Foam Test – Sequence II, Initial Volume/ml	ASTM D892	10/0	10/0	10/0
Foam Test – Sequence III, Initial Volume/ml		10/0	10/0	10/0
Vapor Pressure (mm HG)	ASTM E1719	<0.01	<0.01	<0.01
Specific Heat (Cal/g/°C)	ASTM E1269	0.476	0.481	0.478
Pour Point, °C	ASTM D97	-59	-51	-51
Ash Content (%)	ASTM D482	0.011	0.008	0.008
Corrosion Protection (TORT)	ASTM D665A	Pass	Pass	Pass
Copper Strip Corrosion	ISO 2160	1b, shiny	1a, shiny	1a, shiny
Aging Behavior (Hrs)				
Mg KOH/g	DIN 51587	1.14	0.92	0.31
Hours		1,008	1,008	1,008
Coefficient of Expansion @ 20°C		0.00078	0.00080	0.00079
Coefficient of Expansion @ @ 55°C	ASTM D1903	0.00080	0.00078	0.00078
Weight, lbs/gal. (20°C)		8.57	8.57	8.58
ENVIRONMENTAL DATA				
Biodegradation 28 Day %		81%(Readily Biodegradable)	72%(Readily Biodegradable)	80%(Readily Biodegradable)
Static Sheen Test (15 minutes observation time)	CFR 435		Pass - No Sheen - No Oil Slick	
Toxicity Test - Fresh Water Species - Classification		“Practically Non-Toxic”	“Practically Non-Toxic”	“Practically Non-Toxic”
48 h EL50 (mg/L) with Water Flea (Daphnia magna)		750	430	170
96 h LL50 (mg/L) with Fathead minnow (Pimephales promelas)		*	297	*
Toxicity Test - Sea Water Species - Classification		“Practically Non-Toxic”	“Practically Non-Toxic”	“Practically Non-Toxic”
96 h LL50 (mg/L) with Mysid Shrimp (Mysidopsis bahia)		200	250	330
96 h LL50 (mg/L) with Sheepshead Minnow (Cyprinodon variegatus)		>1000	>1000	>1000
PACKAGING / PART NUMBER				
5 Gallon Pail		Part No. L1020-060	Part No. L1021-060	Part No. L1022-060
55 Gallon Drum		Part No. L1020-062	Part No. L1021-062	Part No. L1022-062

Toxicity Results for Aquatic Species: EL50 = Bio-Synxtreme loading rate (mg/L as formulated fluid) associated with effects on 50% of tested population. LL50 = Bio-Synxtreme loading rate (mg/L as formulated fluid) associated with lethality of 50% of tested population. *Not tested. Bio-Synxtreme HF 32 and 68 are expected to have fathead minnow LL50 values similar to that of 46, based on similar results observed across these products for the other species tested.

District Managers and Specialists

Western Canada:

Robin Tetrault
Summit Agencies Ltd.
 Suite 354
 440-10816 Macleod Trail S.
 Calgary Alberta T2J 5N8
 403-236-8655
 robin@summitagencies.ca

Peter Liston
Summit Agencies Ltd.
 Suite 123 / 2057 111 Street
 Edmonton, Alberta T6J 4V9
 780-406-7462
 peter@summitagencies.ca


Brian Weihs
Summit Agencies Ltd.
 Suite 441 / 1641 Lonsdale Ave.
 North Vancouver, BC V7M 2J5
 604-329-7848 / brian@summitagencies.ca

Hawaii Inquiries:
Jim Girard - VP General Mgr.
Chief Marketing Officer:
 800-733-4755 / JimG@lubriplate.com

Eastern Canada:

Mechanical Sales Co.
 431 Huronia Road
 Unit 4
 Barrie, Ontario L4N 9B3
 800-263-7226

Gord Jopling
 gordj@mesaco.com
 Northern Ontario

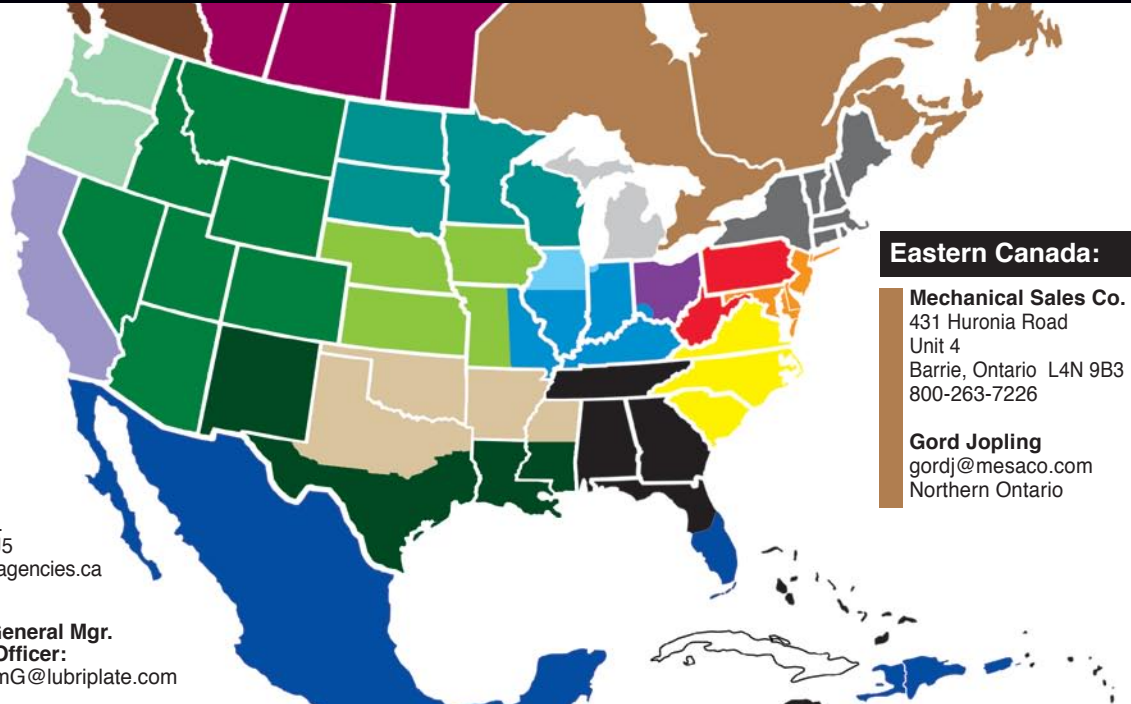

Western Region District Managers

Central Region District Managers

Eastern Region District Managers

Douglas J. Smith
 1705 NW Viewmont Ct
 Silverdale, WA 98383
 360-488-3382
 dsmith@lubriplate.com

Chris Qualizza
 W197 N17141 Stonewall Dr.
 Jackson, WI 53037
 262-339-3659
 cqualizza@lubriplate.com

Chris Franzoni
 21653 Kendyl Court
 Macomb, MI 48044
 586-530-6922
 cfranzoni@lubriplate.com

Kim Henricks
 414 Winter Street
 Elmore, OH 43416
 419-261-2080
 khenricks@lubriplate.com

Jim Zappulla
 176 Tobacco Street
 Lebanon, CT 06249
 860-303-1148
 jzappulla@lubriplate.com

Dan O'Brien
 1359 East Skyview Drive
 Salt Lake City, UT 84124
 801-550-0383
 dobrien@lubriplate.com

Brian Joens
 34 East Fulton Drive
 Des Moines, IA 50315
 bjoens@lubriplate.com
 515-320-1012

Scott Besedick
 1219 Elliston Court
 Crown Point, IN 46307
 219-689-2365
 sbesedick@lubriplate.com

Michael Barto
 531 Allegiance Drive
 Lititz, PA 17543
 717-475-6694
 717-568-8294 (Fax)
 mbarto@lubriplate.com

David Reh
 142 Andrew Street
 Hamilton, NJ 08610
 973-722-6098
 dreh@lubriplate.com

Francis Gondouin
 32 San Marino Drive
 San Rafael, CA 94901
 415-279-0609
 fgondouin@lubriplate.com

Roger Thostenson
 1329 Auburn Place
 Plano, TX 75093
 972-998-0344/972-403-3801 (Fax)
 rthostenson@lubriplate.com

Don Wrocklage
 2330 Winegarden Court
 Wildwood, MO 63011
 314-614-7488
 636-458-7549 (Fax)
 dwrocklage@lubriplate.com

David Roberts
 939 Gallier Place.
 St. John's, FL 32259
 407-760-7933
 droberts@lubriplate.com

Robert A. Reh Jr.
 5312 Meadow Chase Rd.
 Midlothian, VA 23112
 864-270-8558
 rrehjr@lubriplate.com

Mike Wrocklage
 25210 Butterwick Drive
 Spring, TX 77389
 713-725-1294
 mwrocklage@lubriplate.com

Nick Guerrero
 973-934-1929
 nguerrero@lubriplate.com
 Covered Areas: So. FL, PR,
 Central & South America

Specialists:

Vice President & Gen Mgr.
International Inquiries:
Chief Marketing Officer:
Jim Girard - 800-733-4755
 JimG@lubriplate.com

Assistant Vice President
Domestic Sales & Service
Inquiries:
Tim Cusack - 800-733-4755
 TimC@lubriplate.com

Vice President, Sales:
Steve Morrow -
 Office: 973-589-9150
 Cell: 973-722-6516
 SMorrow@lubriplate.com

Vice President - Toledo
Operation and Corporate
Director of Technology:
Sib Hamid - 419-691-2491
 SHamid@lubriplate.com

OEM Marketing Analyst
and Government Agency
Liaison: Ellen Girard -
 908-489-7355
 EGirard@lubriplate.com

Sales & Technical Assistant
to Chief Marketing Officer:
Vera Tehayel - 973-589-9150
 VeraT@lubriplate.com

Domestic Sales Director
Toledo:
Mike Kontak - 419-691-2491
 MikeK@lubriplate.com

Quality Manager:
Jacki Dusza -
 419-691-2491
 JackiD@lubriplate.com

National Accounts Mgr.
Don Wrocklage -
 314-614-7488
 dwrocklage@lubriplate.com

Director of Field Engineering
& Training Services:
David Reh - 973-722-6098
 dreh@lubriplate.com



Lubriplate
 Lubricants

Newark, NJ 07105 / Toledo, OH 43605 / 800-733-4755
 www.lubriplate.com / LubeXpert@lubriplate.com



Authorized Distributor:

ATLANTIC CORDAGE
 35 Mileed Way
 Avenel, NJ 07001
 Tel 732-574-0700
 Fax 732-574-9191
 atlantic-group.com

E-mail: sales@atlantic-group.com